


**Fan Panels**

**FAN PANEL - BLANK**

- Black powder-coated steel
- Fans sold separately
- Mounting hardware not included



Create your own rack mount fan with these panels. Designed for 120mm fans. Perfect as an exhaust fan panel when using "push-pull" cooling.



MODEL	
PPGP191202BK1	

**FAN PANEL**

- Air movement: 100 CFM
- Sound level: 27dB
- Black finish
- Digital processor varies fan speed based on equipment temperature
- Local and remote notification of over-temperature and fan fault to control system
- Runs on 110VAC



This two-rackspace, ultra-quiet system provides smart cooling and monitoring in areas where fan noise is unacceptable: boardrooms, classrooms, offices, houses of worship, etc. Thermostatic fan control varies fan speed based on enclosure

temperature. Over-temperature notification (local and remote) offers additional operation monitoring. Can also be set up to trigger an external alarm in the event of fan failure.

MODEL	
UQFP-4	

**FAN PANEL WITH SENSOR & DISPLAY**

- Air movement: 100 CFM
- Sound level: 27dB
- Black finish
- Onboard processor monitors rack temperature via external sensor
- Fan speed varies based on equipment temperature
- Local and remote notification of over-temperature and fan-fault to the control system




The smart, quiet way to keep a custom electronics system cool and satisfy the most demanding clientele. The two-rackspace, ultra quiet fan panel features a unique on-board processor that controls fan speed in direct proportion to equipment temperature resulting in quiet, reliable installations. The perfect thermal management solution for media rooms, screening rooms, etc.

MODEL	
UQFP-4DRA	

**Fan Trays**

- 19" panel width
- Low profile 1U (1.75") high
- Circuit breaker protected
- Textured black body finish
- 6ft 14/3 cord with grounded plug
- Thermally protected ball bearing fans
- Integral finger guards above and below fans

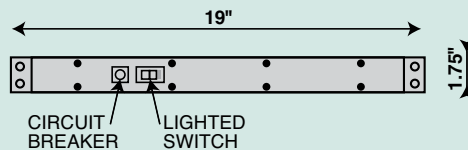

Fan trays provide a compact and economical solution for cooling in electronic cabinets. All units mount on standard EIA 19" racks in a 1U space. Circuit breaker and lighted switch are standard features. 115VAC models are UL and CSA approved.



FT300HA1BK



FT600HA1BK



FT900HA1BK



MODEL	CFM	AMPS	WATTS	VOLTAGE	CASE DIMENSIONS
FT300HA1BK	300 CFM	0.5	40	115 VAC	432 x 190 x 44mm (17 x 7.5 x 1.75")
FT600HA1BK	600 CFM	1	80	115 VAC	432 x 330 x 44mm (17 x 13 x 1.75")
FT900HA1BK	900 CFM	1.5	120	115VAC	432 x 470 x 44mm (17 x 18.5 x 1.75")